




- Heavy duty applications
- Slow down valve
- Internal & external hard chrome plated cylinders
- Cylinders with double sealings
- CE certified
- Overload valve
- Hold-to-run joystick
- Circulation of oil

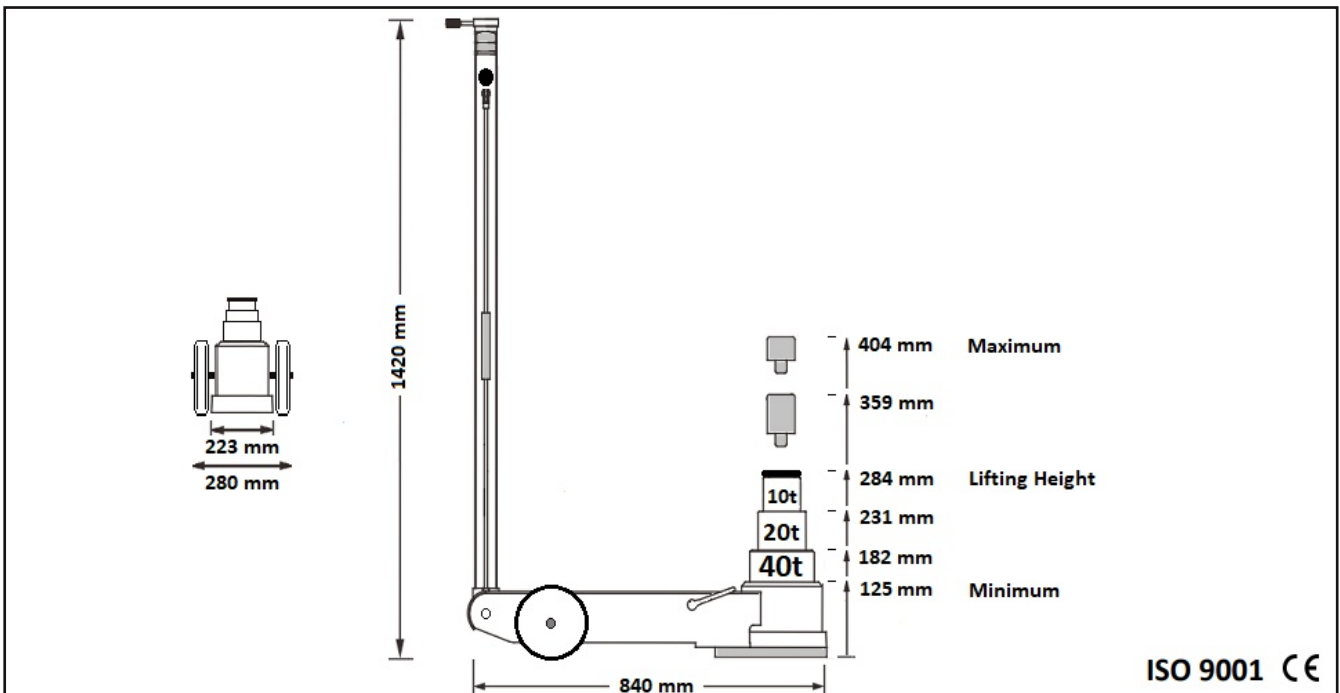

Model	Capacity	Air pressure	Min. height	Max. height	Lifting height	Extension height	Weight
TPH40T-3	40T-20T-10T	9 - 12 bar	125 mm	404 mm	40T: 57 mm 20T: 49 mm 10T: 53 mm	75 mm + 45 mm	44 kg