




- Heavy duty applications
- Slow down valve
- Internal & external hard chrome plated cylinders
- Cylinders with double sealings
- CE certified
- Overload valve
- Hold-to-run joystick
- Circulation of oil

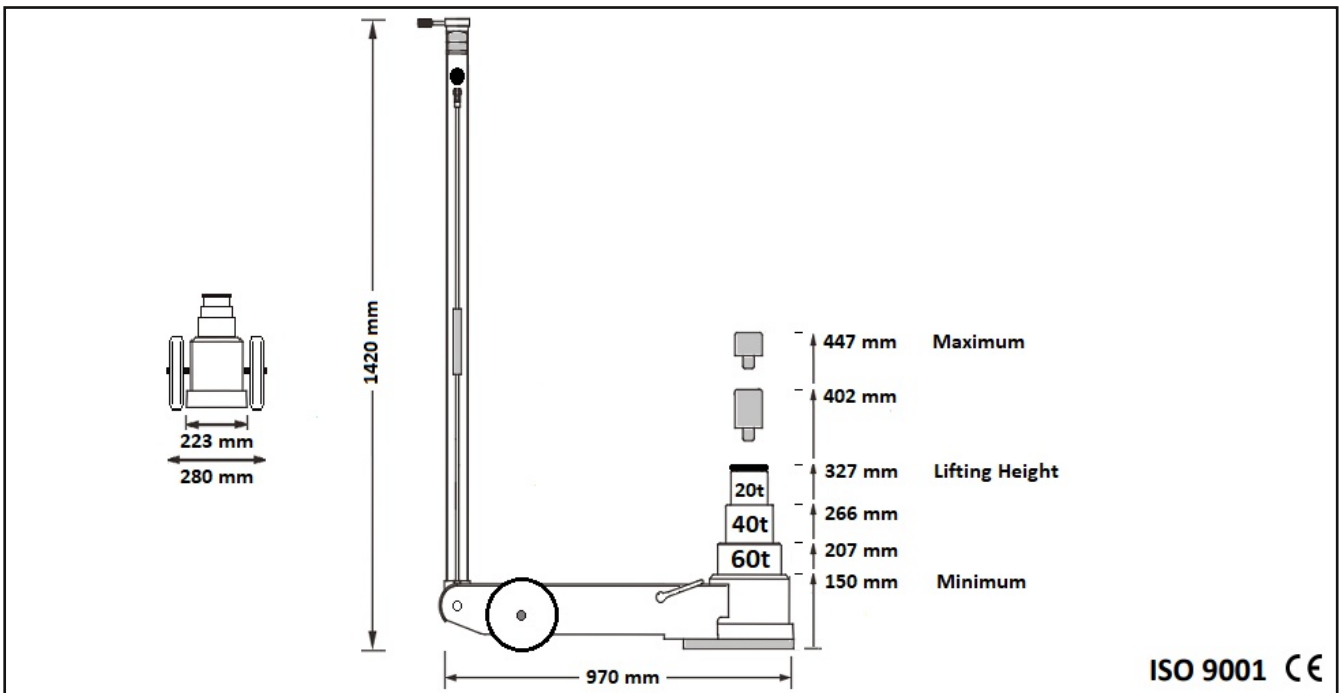

Model	Capacity	Air pressure	Min. height	Max. height	Lifting height	Extension height	Weight
TPH60T-3	60T-40T-20T	9 - 12 bar	150 mm	447 mm	60T: 57 mm 40T: 59 mm 20T: 61 mm	75 mm + 45 mm	67 kg